

 **PROFILINK** Premium


- Depth 70 mm
- 5 chambered sash
- 5 chambered frame
- Up to 36 mm isolation glass
- $U_f = 1.4 \text{ W/m}^2\text{K}$

- 70 mm Basis- Bautiefe
- 5-Kammer-Bauweise des Rahmens
- 5-Kammer-Bauweise des Flügels
- Glasdicke bis 36 mm möglich
- Dämmwerte von $U_f = 1.4 \text{ W/m}^2\text{K}$

- Epaisseur 70 mm
- Ouvrant à 5 chambres
- Dormant à 5 chambres
- Vitrage d'isolation jusqu'à 36 mm
- $U_f = 1.4 \text{ W/m}^2\text{K}$

- Profundidad 70 mm
- Hoja de 5 cámaras
- Marco de 5 cámaras
- Vidrio de aislamiento hasta 36 mm
- $U_f = 1.4 \text{ W/m}^2\text{K}$

- Ширина 70 мм
- 5 камерная створка
- 5 камерная рама
- до 36 мм стеклопакет
- $U_f = 1.4 \text{ W/m}^2\text{K}$

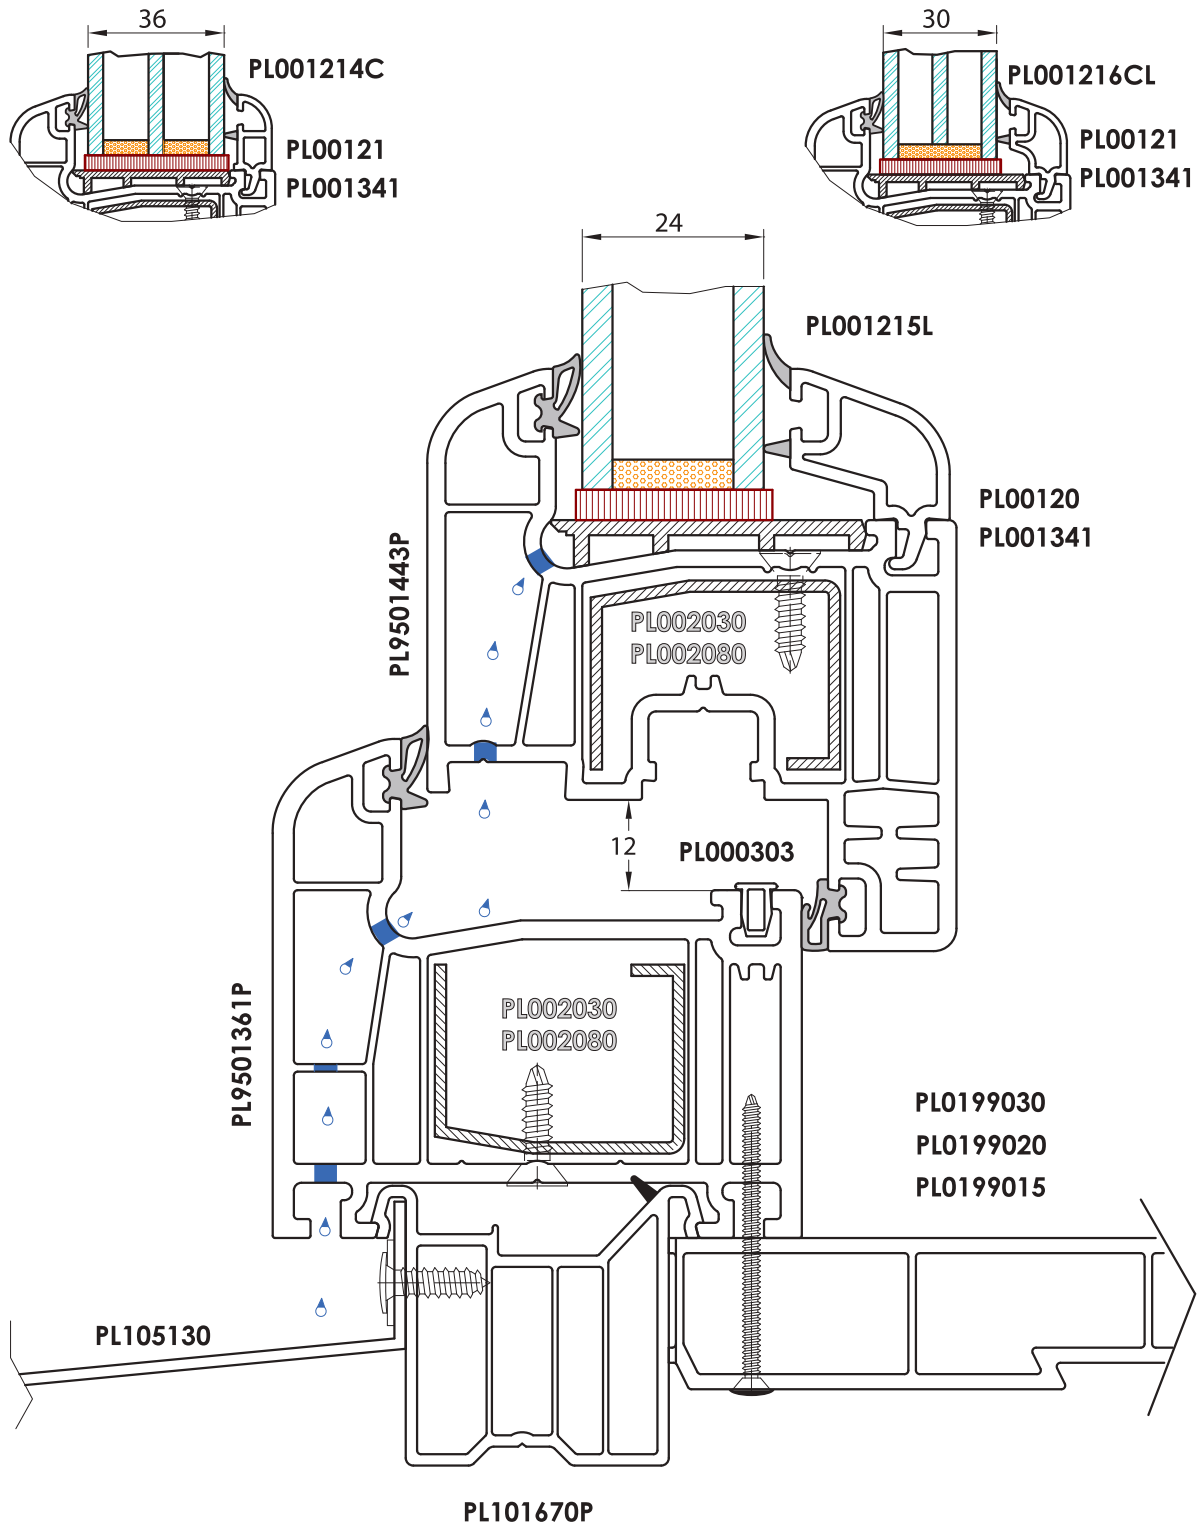

Components:

- PL9501361P - Frame
- PL9501443P - Sash 5P
- PL001215L - Glassbead 21
- PL001214C - Glassbead 9
- PL001216CL - Glassbead 15
- PL101670 - Wall connector OP
- PL002030 - Steel reinforcement
- PL0199030 - Sill 300
- PL0199020 - Sill 200
- PL0199015 - Sill 150
- PL105130 - AL sill
- PL000303 - Decorative frame profile